

AC117 Series

High G Measurement Accelerometer, Top Exit 2 Pin Connector, 50 mV/g, $\pm 10\%$



VIBRATION ANALYSIS HARDWARE



Product Features


50 mV/g General Purpose Sensor

Excellent for Higher g Applications

- ▶ ± 100 g, Dynamic Range
- ▶ 50 mV/g, $\pm 10\%$ Sensitivity
- ▶ 1,0-12500 Hz (60-750,000 CPM)

AC117-1A 2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

AC117-2C

CB103 Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC117-3C

CB206 Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC117-6C

CB611 Heavy Duty Armored Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC117	M/ or M8/AC117	<u>Environmental</u>		
Sensitivity ($\pm 10\%$)	50 mV/g		Operating Temperature Range	-58 to 250 °F	-50 to 121 °C
Frequency Response (± 3 dB)	60-750,000 CPM	1,0-12500 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response ($\pm 10\%$)	240-540,000 CPM	4,0-9000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 100 g, peak		Sealing	Welded, Hermetic	
	*V _{source} \geq 22V, 12Vbias		Submersible Depth	200 ft.	60 m
<u>Electrical</u>			SIL Rating	SIL 2	
Settling Time	5 Seconds		<u>Physical</u>		
Voltage Source (IEPE)	18-30 VDC		Sensing Element	PZT Ceramic	
Constant Current Excitation	2-10 mA		Sensing Structure	Shear Mode	
Spectral Noise @ 10 Hz	8 μ g/ $\sqrt{\text{Hz}}$		Weight	3.2 oz	90 grams
Spectral Noise @ 100 Hz	2.5 μ g/ $\sqrt{\text{Hz}}$		Case Material	316L Stainless Steel	
Spectral Noise @ 1000 Hz	1.7 μ g/ $\sqrt{\text{Hz}}$		Mounting Thread	1/4-28 Blind Tapped Hole	
Output Impedance	<100 ohm		Connector (Non-Integral)	2 Pin MIL-C-5015	
Bias Output Voltage	10-14 VDC		Resonant Frequency	1,380,000 CPM	23000 Hz
Case Isolation	>10 ⁸ ohm		Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
			Mounting Hardware Supplied	1/4-28 Stud	M6x1 or M8x1.25 Adapter Stud
			Calibration Certificate	CA10	

Typical Frequency Response

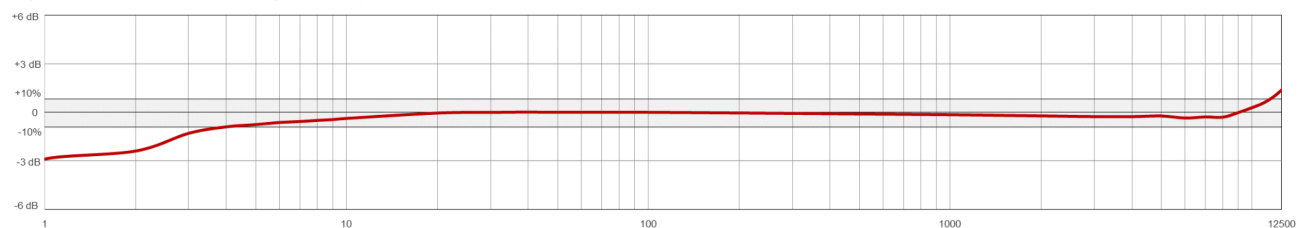

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900