

# VE136 Series

Piezo Velocity Sensor, Side Exit 2 Pin Connector, 500 mV/in/sec,  
±10%



VIBRATION ANALYSIS HARDWARE



## Product Features

500 mV/in/sec (20 mV/mm/sec) Sensitivity


1,0-7000 Hz (60-420,000 CPM) Frequency Response

- ▶ ±10 in/sec, Peak Dynamic Range
- ▶ 2 Pin MIL Connection or Integral Option
- ▶ Integrates to Velocity in the Sensor

### VE136-1A

2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

### VE136-2C

Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

### VE136-3C

Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

### VE136-6C

Heavy Duty Armored Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	VE136	M/VE136	<u>Environmental</u>		
Sensitivity (±10%)	500 mV/in/sec		Operating Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	60-420,000 CPM	1,0-7000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	120-240,000 CPM	2,0-4000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 10 in/sec. pk		Sealing	Welded, Hermetic	
	*Vsource ≥ 22V, 12Vbias		Submersible Depth	200 ft.	60 m
<u>Electrical</u>			<u>Physical</u>		
Settling Time	<4 Seconds		Sensing Element	PZT Ceramic	
Voltage Source (IEPE)	18-30 VDC		Sensing Structure	Shear Mode	
Constant Current Excitation	2-10 mA		Weight	5.1 oz	145 grams
Spectral Noise @ 10 Hz	200 μ IPS/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 100 Hz	6 μ IPS/√Hz		Connector (Non-Integral)	2 Pin MIL-C-5015	
Spectral Noise @ 1000 Hz	0.7 μ IPS/√Hz		Resonant Frequency	1,320,000 CPM	22000 Hz
Output Impedance	<100 ohm		Mounting Torque	2 to 5 ft. lbs	2,7 to 6,8 Nm
Bias Output Voltage	10-14 VDC		Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
Case Isolation	>10 <sup>8</sup> ohm		Calibration Certificate	CA10	

## Typical Frequency Response

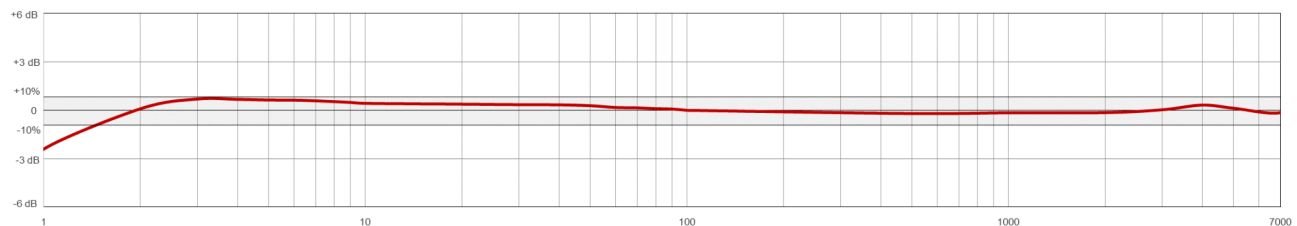

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900